


Dryer

Conveyor



Temperature Controller



Ratio valve, alternates between 2 types of materials on the basis of a few second cycle.

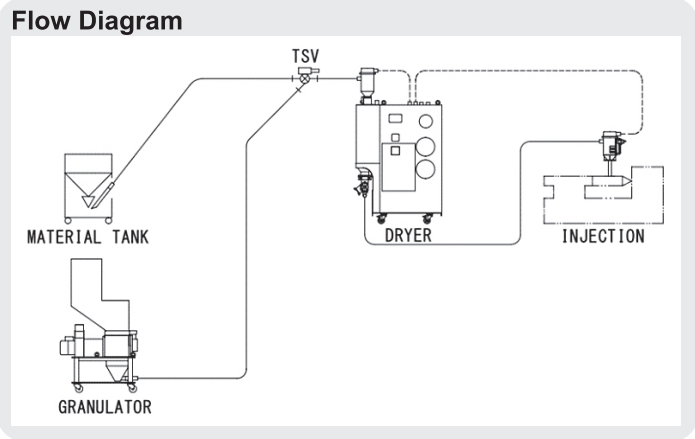

Easily installed to a pole or any other locations. Easy Maintenance.

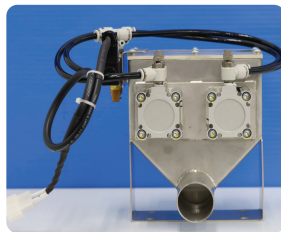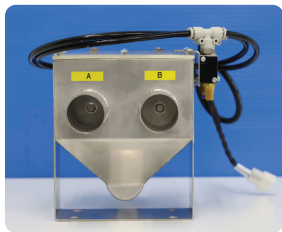

Standard Specification

Model	Unit	TSV-38	TSV-50
Power Supply	V	AC200~220V, 50Hz, 1 Phase	
Air Supply	Pressure	0.4 ~ 0.5	
Conveying Pipe	mm	φ38	φ50
Maximum Measuring Capacity	kg/h	300	
Outer Dimensions	W	200	
	D	180	
	H	210	
Product Weight	kg	6.3	

Blender

Granulator

System & Others

Safety bar (Option)



MT-50

Standard Specification

Model	Unit	MT-50	MT-100	MT-200	MT-300	
Power Supply	Voltage	AC200V (AC380V), 50Hz, 3 Phase				
	Apparent Power	kVA	1.5/2.1	1.95/2.55	2.95/3.55	3.87/4.5
	Required Breaker Capacity	A	10/5		15/10	
Handling Capacity Per Batch	kg	50	100	200	300	
	L	148	278	600	882	
Rotating Speed(50/60Hz)	rpm	25/30		24/28	23/28	
Mixing Time (Time Provided)	min	10 to 15 min			10 to 20 min	
Equipment Specification	Material	SUS304 1.5 (Thick)				
	Reduction Gear (Ratio)	1/20				
	Electric Motor (4 pole)	kW	0.4	0.75	1.5	2.2
Outer Dimensions	W	mm	1,200	1,300	1,900	2,150
	D	mm	950	1,000	1,300	1,500
	H	mm	1,648	1,850	1,910	2,165
Installation Space	W	mm	2,400	2,500	3,100	3,350
	D	mm	2,150	2,200	2,500	3,216
	H	mm	2,455	2,692	2,698	3,134
Product Weight	kg	150	170	350	590	

Options

- Safety lock (Safety bar) • Alarm indicator